


033641

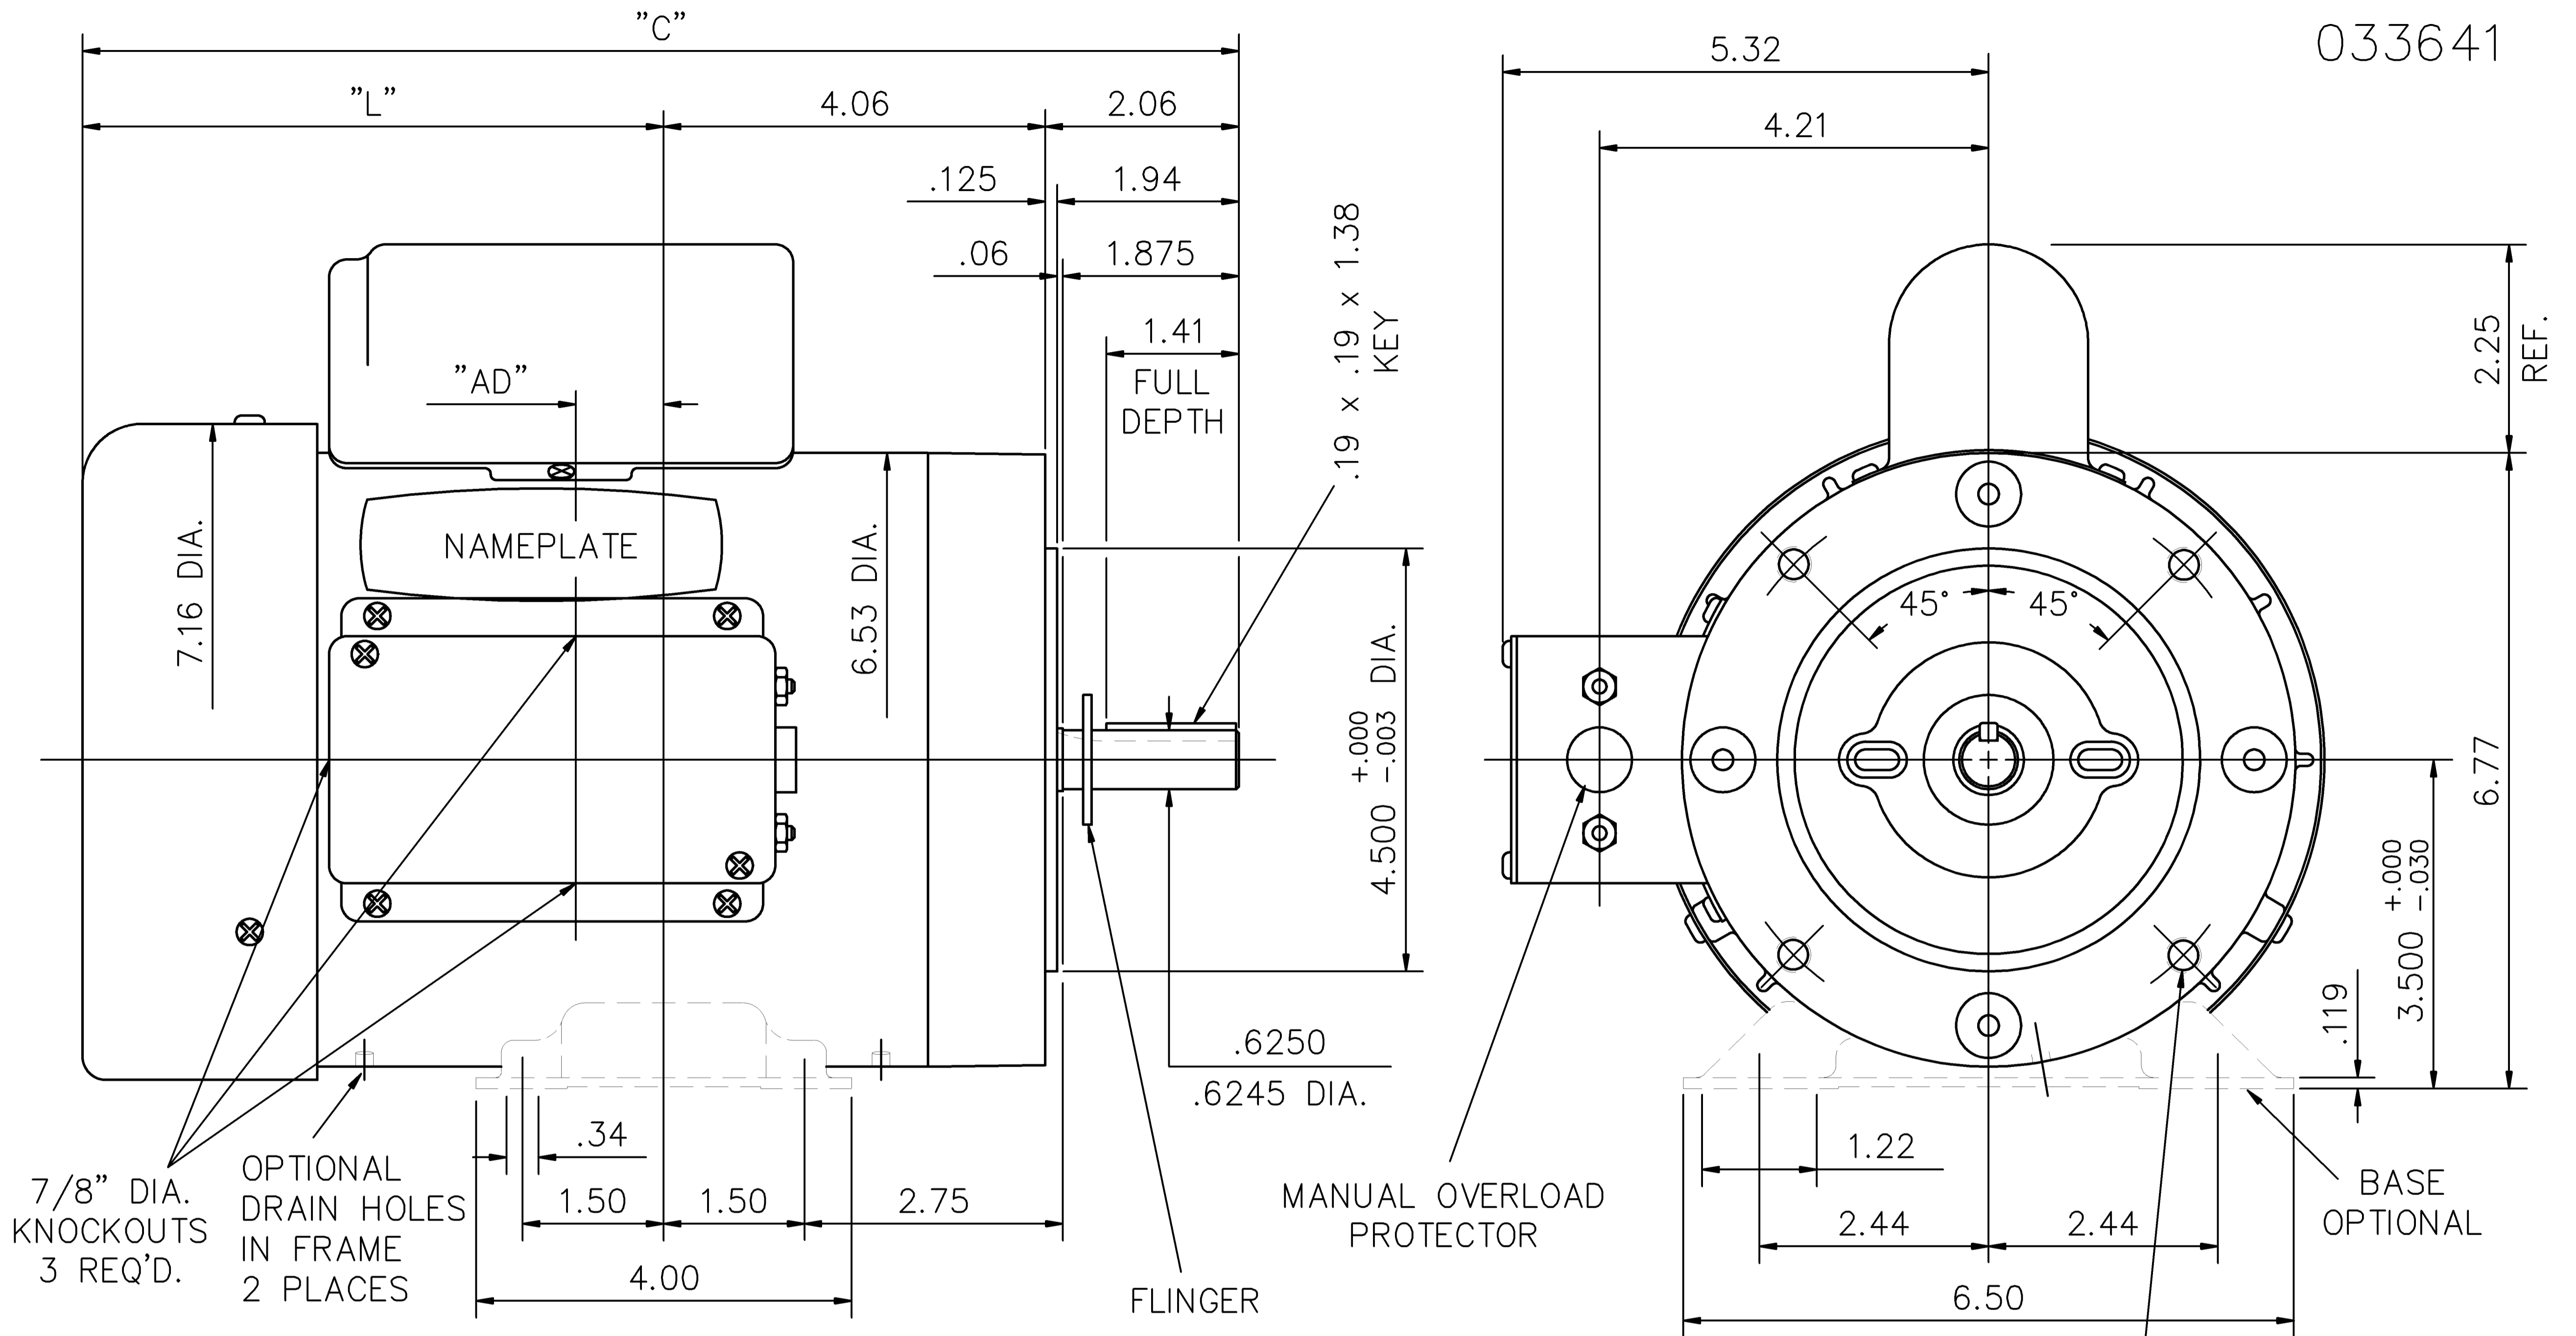

7/8" DIA. KNOCKOUTS 3 REQ'D.

OPTIONAL DRAIN HOLES IN FRAME 2 PLACES

- SPECIAL FEATURES:
- 1) MANUAL OVERLOAD PROTECTOR
 - 2) BRASS NAMEPLATE
 - 3) GASKETS THROUGHOUT
 - 4) FLINGER ON SHAFT

FARM DUTY MOTOR

FRAME	"C"	"L"	"AD"
C56C	10.81	4.69	-.56
D56C	11.31	5.19	-.06
E56C	11.81	5.69	.44
F56C	12.31	6.19	.94

3/8-16 TAP - .56 DEEP
 4 REQ'D. ON A 5.875 DIA. B.C.
 MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
 MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

2 ADDED OPTIONAL DRAIN HOLES
 1 BASE WAS SOLID

KAZ 11/08/91
 PG 4/5/90

RT 2/10/89
 PG 2/14/89
 DJW 2/14/89
 .375=1
 033633
 6C17FK39

OUTLINE - 56 FRAME
 "C" FACE FARM DUTY
 LEESON CANADA A 033641